

Technical drawing of a mechanical component, likely a pump or motor housing, showing front and side views with dimensions in millimeters.

Front View Dimensions:

- Overall width: 311 mm
- Overall height: 281 mm
- Top flange diameter: 169 mm
- Bottom flange diameter: 169 mm
- Top flange thickness: 10 mm
- Bottom flange thickness: 8 mm
- Top flange hole diameter: $\phi 22.2$
- Bottom flange hole diameter: $\phi 22.2$
- Top flange hole spacing: 38 mm
- Bottom flange hole spacing: 10 mm
- Top flange hole diameter: 4-20キリ
- Bottom flange hole diameter: 4-20キリ

Side View Dimensions:

- Overall width: 100 mm
- Overall height: 100 mm
- Top flange diameter: 169 mm
- Bottom flange diameter: 169 mm
- Top flange thickness: 10 mm
- Bottom flange thickness: 8 mm
- Top flange hole diameter: $\phi 22.2$
- Bottom flange hole diameter: $\phi 22.2$
- Top flange hole spacing: 38 mm
- Bottom flange hole spacing: 10 mm
- Top flange hole diameter: 4-20キリ
- Bottom flange hole diameter: 4-20キリ

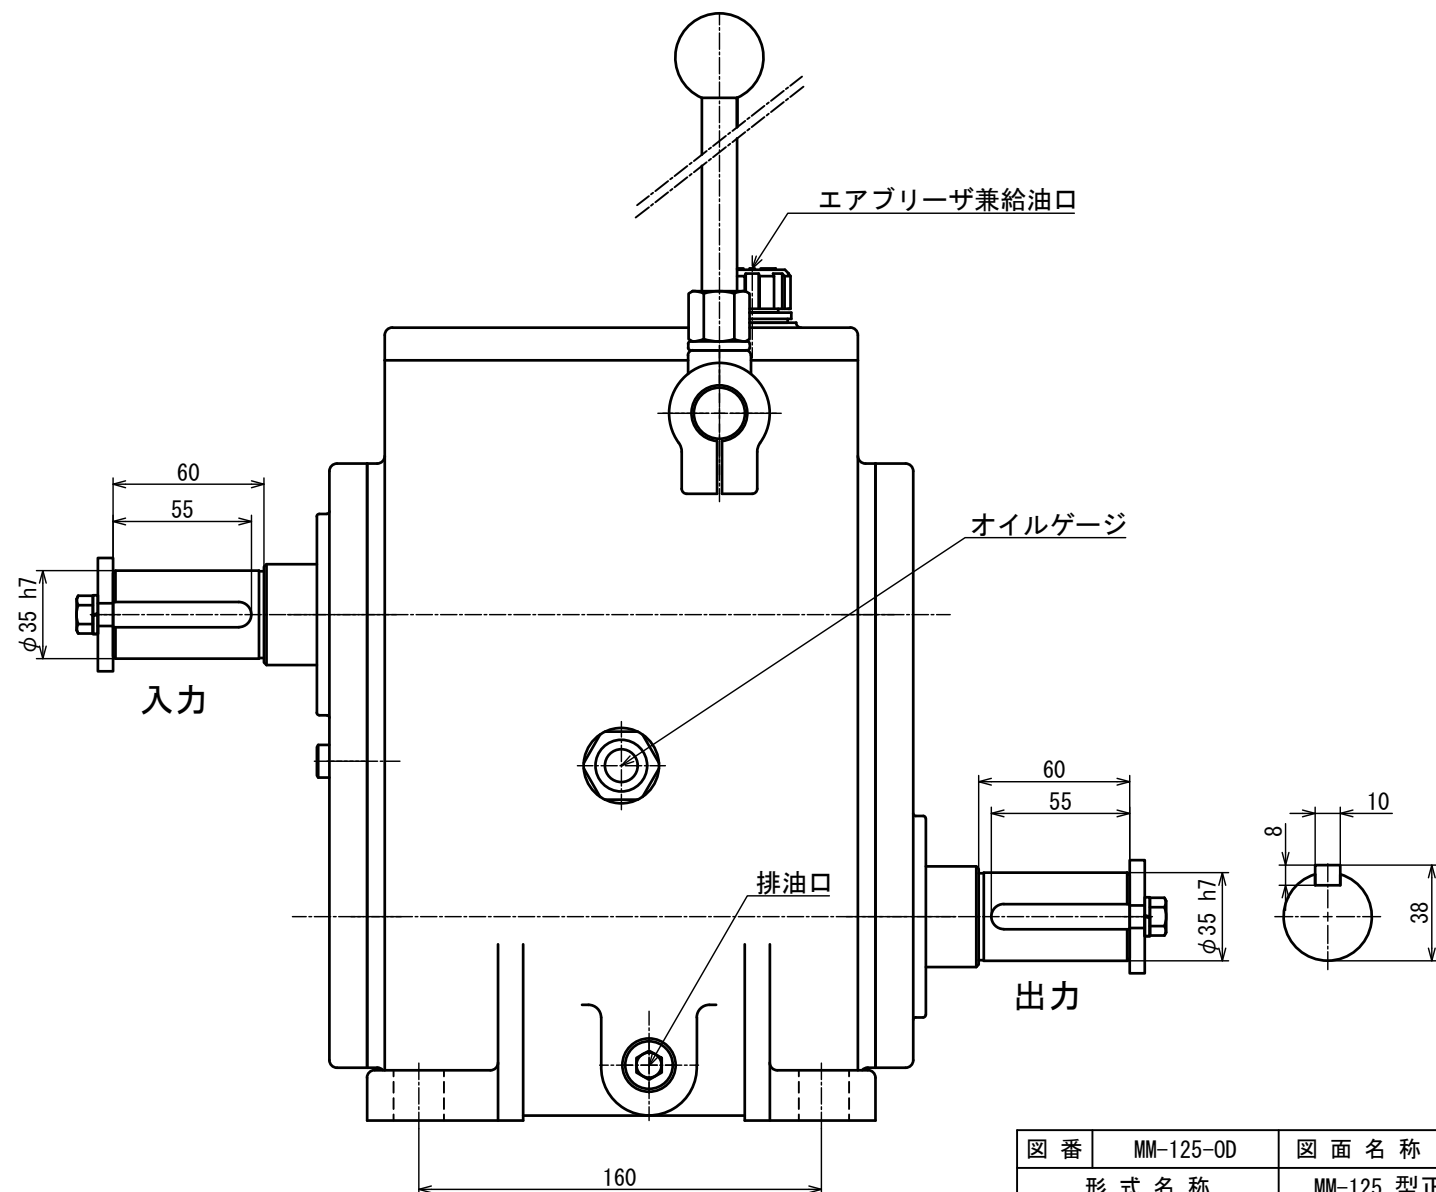


図 番	MM-125-0D	図 面 名 称	MM-125 型正逆切替機 外形図							
形 式 名 称		MM-125 型正逆切替機		尺 度		1:2	角 法			
 株式会社 益 製 作 所	日 付		2024年 05月 29日		承認		検図		製図	